

# DIFFERENTIAL PRESSURE TRANSMITTER

## PRODUCT CATALOGUE



PRESSURE at the highest LEVEL.

**BD|SENSORS**  
pressure measurement

>> [www.bdsensors.de](http://www.bdsensors.de)



# PRESSURE AT THE HIGHEST LEVEL

“Successful medium-sized companies are not successful because they are active in many areas, but rather because they concentrate on one area and do it better than anyone else.”

This is our philosophy. That’s why BD|SENSORS has concentrated on electronic pressure measurement technology from the beginning.

With our unremitting product and quality strategy we have been successful in becoming a major player on the world market for electronic pressure sensing devices within a few years.

With 260 employees at 4 locations in Germany, the Czech Republic, Russia and China BD|SENSORS has solutions from 0.1 mbar to 8000 bar:

- > pressure sensors, pressure transducers  
pressure transmitters

---

- > electronic pressure switches

---

- > pressure measuring devices with display and  
switching outputs

---

- > hydrostatic level probes

---

Two pressure transmitters and a submersible probe, based on a stainless steel silicon sensor were the beginning. Today the range extends to more than 100 standard products, from economical OEM devices to high-end products with HART® communication or field bus interface.

In addition we have developed hundreds of customer-specific applications, underlining the competence and flexibility of BD|SENSORS. The excellent price/performance ratio of our products is proof of the fact that we are able to meet the toughest demand: Being a problem-solver for our customers.

For large production batches as well as for small production numbers, no matter for what medium or external factors, with almost any mechanical or electrical connection - we solve your problem

**flexibly, quickly and cost-efficiently.**

## INDEX

PRECISION	4-17
DPT 200	4-13
DPT 100	14-17
INDUSTRY	18-28
PLANT AND MACHINE ENGINEERING	
DMD 331	18-21
DMD 831	22-24
DMD 341	25-28
HVAC	
DPS 300	29-32
DPS 200	33-35
4 ADVANTAGES	36



# DPT 200

## Differential Pressure Transmitter for Process Industry with HART®-Communication

accuracy according to IEC 60770:  
0.075 % FSO

### Differential pressure

from 1 mbar up to 20 bar

### Static pressure

max. 400 bar

### Output signal

2-wire: 4 ... 20 mA

### Special characteristics

- ▶ static over pressure 400 bar
- ▶ rangeability max. 100:1
- ▶ aluminium die cast case
- ▶ HART®-communication
- ▶ output signal: linear or square root extraction






### Optional versions

- ▶ Ex-version group I
  - Ex ia = intrinsically safe version for firedamp mines
- ▶ Ex-version group II
  - Ex ia = intrinsically safe version
  - Ex d = flameproof enclosure
- ▶ LC display
- ▶ stainless steel housing

The differential pressure transmitter DPT 200 has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

DPT 200 can be equipped with various chemical seals and different membrane materials to reach an optimal adaptation to the application.

### Preferred areas of use are

-  Oil and gas industry
-  Chemical and petrochemical industry
-  Energy industry
-  Food and beverage
-  Paper industry





Differential pressure ranges					
Sensor type	A	B	C	D	E
Differential pressure range dp	10 mbar	60 mbar	400 mbar	2.5 bar	20 bar
Setting limits (offset and span in this range freely adjustable)	-10 ... 10 mbar	-60 ... 60 mbar	-400 ... 400 mbar	-2.5 ... 2.5 bar	-20 ... 20 bar
Lowest permissible span	1 mbar	2 mbar	4 mbar	25 mbar	200 mbar
Permissible static pressure	70 bar	160 bar	160 bar	160 bar	160 bar
optional	-	-	400 bar	400 bar	400 bar
Rangeability TD (with respect to the differential pressure range dp)	10:1	30:1	100:1	100:1	100:1

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA with HART® communication / $V_S = 16.5 \dots 42 V_{DC}$
Option IS-version	2-wire: 4 ... 20 mA with HART® communication / $V_S = 16.5 \dots 28 V_{DC}$
Error signal Namur NE43	high / low (adjustable)
Performance	
Accuracy	turn-down $\leq 10:1$ : $\leq \pm 0.075 \%$ FSO turn-down $> 10:1$ : $\leq \pm [0.0075 \times \text{turn-down}] \%$ FSO with turn-down = nominal pressure range / adjusted range (FSO = Full Scale Output)
Influence supply	$\leq 0.001 \%$ FSO / 10 V
Influence static pressure	type A: $\pm [0.015 \text{ mbar} + 0.1 \%$ of the adjusted range] / 40 bar type B: $\pm [0.06 \text{ mbar} + 0.075 \%$ of the adjusted range] / 160 bar type C: $\pm [0.2 \text{ mbar} + 0.05 \%$ of the adjusted range] / 160 bar type D: $\pm [1.25 \text{ mbar} + 0.05 \%$ of the adjusted range] / 160 bar type E: $\pm [10 \text{ mbar} + 0.05 \%$ of the adjusted range] / 160 bar
Influence installation position	max. 400 Pa (can be compensated by zero-point correction)
Long term stability	type A: $\leq \pm (0.5 \%$ x differential pressure range dp) / year at reference conditions type B: $\leq \pm (0.2 \%$ x differential pressure range dp) / year at reference conditions type C - E: $\leq \pm (0.1 \%$ x differential pressure range dp) / year at reference conditions
Permissible load	$R_{max} = [(V_S - 16.5 \text{ V}) / 0.023 \text{ A}] \Omega$ HART®-communication: $R = 230 \Omega \dots 600 \Omega$
Response time	type A: approx. 1.6 sec type B: approx. 0.4 sec type C: approx. 0.2 sec type D: approx. 0.2 sec type E: approx. 0.1 sec
Damping	electronic: 0.1 ... 60 sec plus response time
Thermal effects (offset and span)	
Temperature range -20 ... +65°C	type A: $\pm [0.45 \times \text{turn-down} + 0.25] \%$ of the adjusted range type B: $\pm [0.30 \times \text{turn-down} + 0.20] \%$ of the adjusted range type C - E: $\pm [0.20 \times \text{turn-down} + 0.10] \%$ of the adjusted range
Temperature range -40 ... -20°C and +65 ... +100°C	type A: $\pm [0.45 \times \text{turn-down} + 0.25] \%$ of the adjusted range type B: $\pm [0.30 \times \text{turn-down} + 0.20] \%$ of the adjusted range type C - E: $\pm [0.20 \times \text{turn-down} + 0.10] \%$ of the adjusted range
Permissible temperatures	
Environment / storage	without display: -40 ... 85 °C with display: -20 ... 65 °C (85°C without function)
Media wetted parts	silicone oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.) fluorolube oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.)
Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Mechanical stability	
One-sided overload	according to the maximum static pressure of differential pressure sensor
Vibration	5 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	100 g / 1 msec according to DIN EN 60068-2-27
Filling fluids	
Standard	silicone oil (-40...125 °C)
Option (on request)	fluorolube oil (-40...125 °C) others on request


<b>Materials</b>	
Pressure port / flange	stainless steel 1.4401 (316) <span style="float: right;">others on request</span>
Housing	standard: aluminium die cast with epoxy painting (blue) option: stainless steel 1.4301 (304) <span style="float: right;">others on request</span>
Cable gland	aluminium die cast housing: PA grey (for cable-Ø 5 ... 9 mm) stainless steel housing: stainless steel 1.4404 (316L) (for cable-Ø 7 ... 12 mm) option IS-version: specified under "Explosion protection"
Vent and dump valves, blanking plugs, type plate	stainless steel 1.4401 (316) <span style="float: right;">others on request</span>
Bolts and nuts	steel, zinc flake coated
Seals	standard: FKM (-30 ... 250 °C) options: EPDM (-40 ... 125 °C) NBR (-40 ... 125 °C) PTFE (-180 ... 250 °C) <span style="float: right;">others on request</span>
Diaphragm	standard: stainless steel 1.4435 (316L) option: Hastelloy® C-276 (2.4819) <span style="float: right;">others on request</span>
Media wetted parts	pressure port, seal, diaphragm
<b>Explosion protection – aluminium die cast housing</b>	
Approval AX18-DPT200 intrinsically safe version	IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group II: II 1/2G Ex ia IIC T4 Ga/Gb / II 2D Ex ia IIIC T 85 °C Db safety technical maximum values: $P_i = 660 \text{ mW}$ , $U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $C_i = 29.7 \text{ nF}$ , $L_i$ negligible permissible temperatures for environment: -40 ... 60 °C cable gland in PA grey; for cable-Ø 5 ... 9 mm
Approval AX18B-DPT200 flameproof enclosure	IBExU 15 ATEX 1110 X / IECEx IBE 16.0006X group II: II 2G Ex db IIC T6 Gb permissible temperatures for environment: -40 ... 65 °C cable gland in brass; for cable-Ø 10 ... 14 mm
<b>Explosion protection – stainless steel housing</b>	
Approval AX18-DPT200 intrinsically safe version	IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group I (mines): I M1 Ex ia I Ma group II: II 1G Ex ia IIC T4 Ga / II 2D Ex ia IIIC T85°C Db safety technical maximum values: $P_i = 660 \text{ mW}$ , $U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $C_i = 29.7 \text{ nF}$ , $L_i$ negligible permissible temperatures for environment: -40 ... 60 °C cable gland in stainless steel 1.4404 (316L); for cable-Ø 7 ... 12 mm
<b>Miscellaneous</b>	
Display (optionally)	type: LCD, lines: 2, digits: 8, bargraph: 0...100%, rotatability: 90°-steps and / or by turn of display module
Configuration	- offset / span local via 2 buttons - local configuration with an optional display - complete configuration via HART®
Ingress protection	IP 67
Installation position	any
Weight	approx. 3 kg (depending on version)
Current consumption	approx. 23 mA
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU
<b>Wiring diagram</b>	

### Pin configuration


Electrical connection	terminal clamps (for cable-Ø max. 2.5 mm <sup>2</sup> )
Supply + (V <sub>s</sub> +)	+
Supply / Test - (V <sub>s</sub> -)	-
Test +	TEST +
Ground	⊕

### Dimensions (mm / in)

#### DPT 200 with display

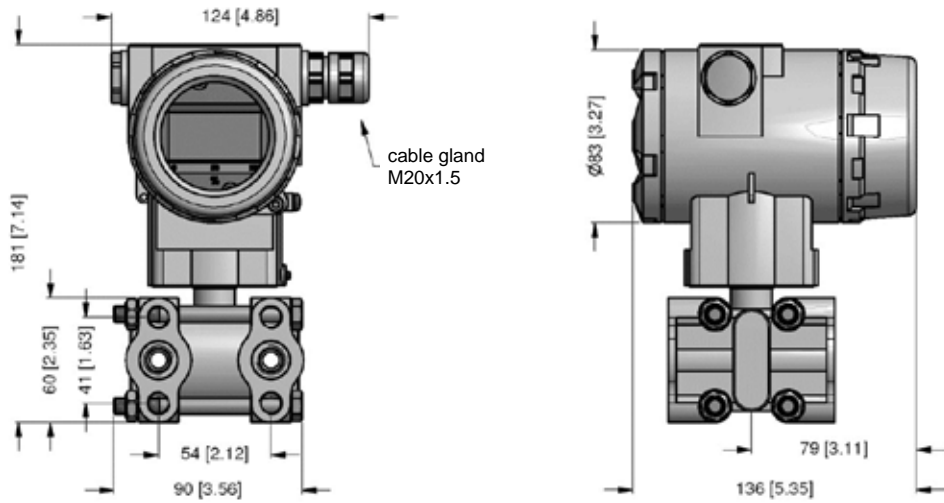


#### DPT 200 without display

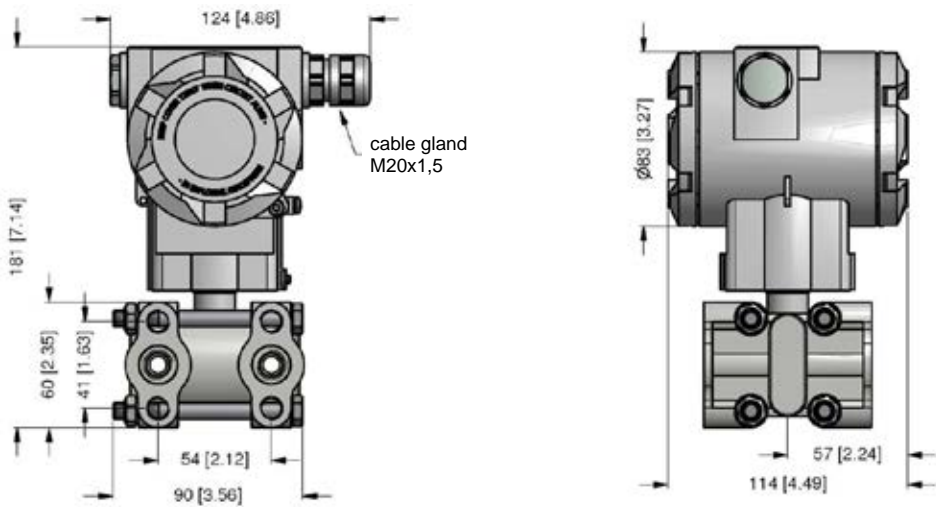


## Process connections


code N20 / N25  
1/4" - 18 NPT / fixing 7/16 UNF

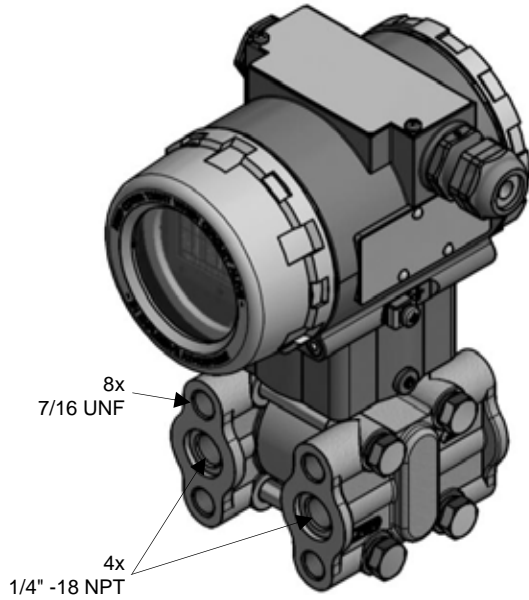


code N30  
1/4" - 18 NPT / fixing M10

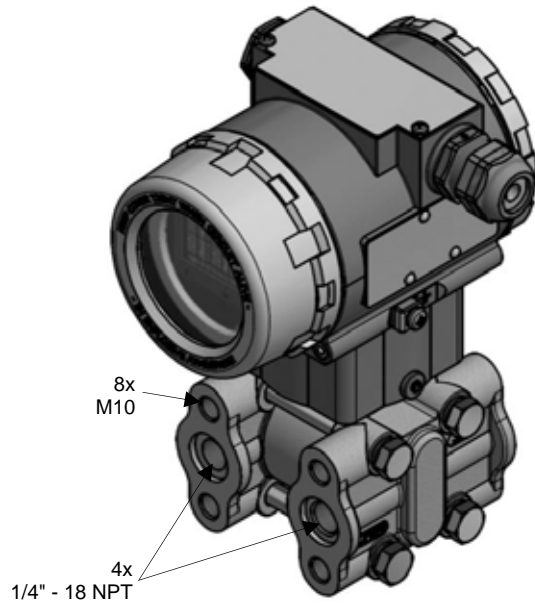

code N21  
1/4" - 18 NPT vertical / fixing 7/16 UNF

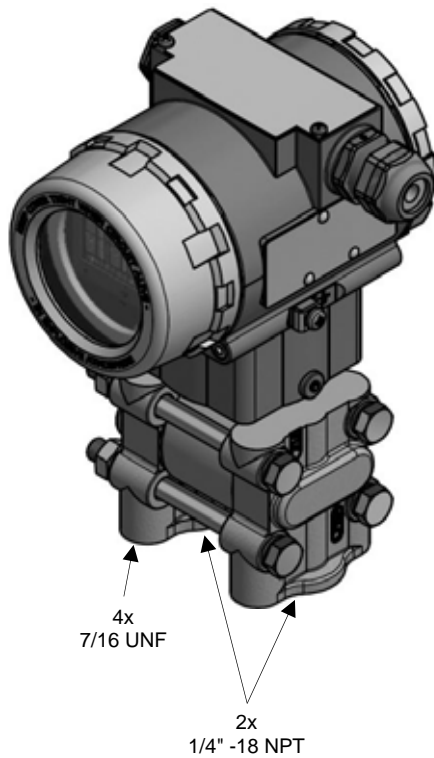

code N31  
1/4" - 18 NPT vertical / fixing M10

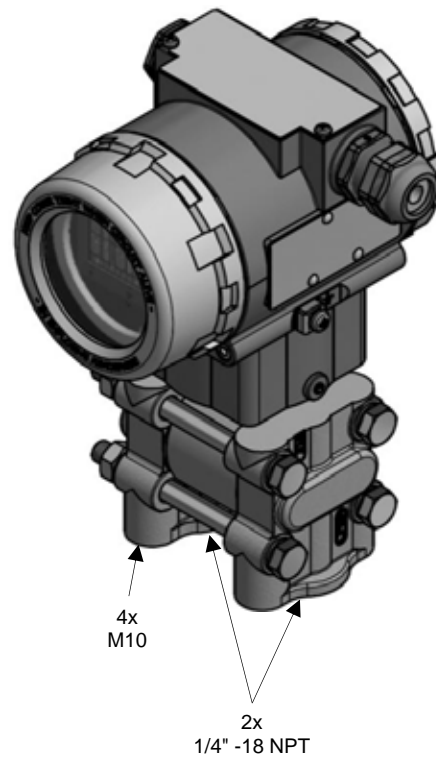


⇒ In scope of delivery two locking screws 1/4" - 18 NPT are included as standard.




Valves (optionally)

code 1

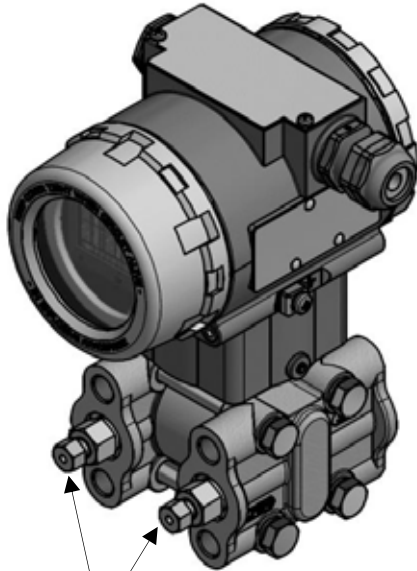


vent position:  
straight (2x)

code 2

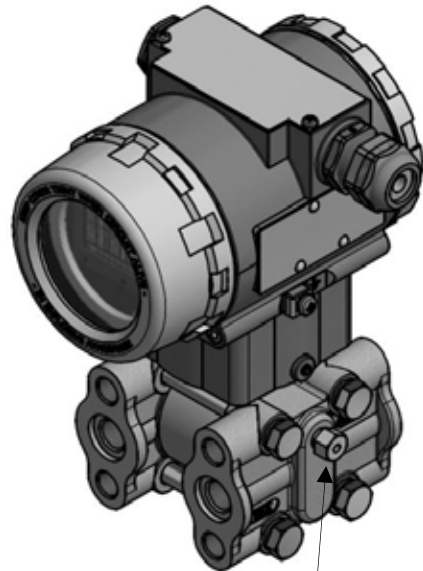


vent position:  
top (2x)

code 3

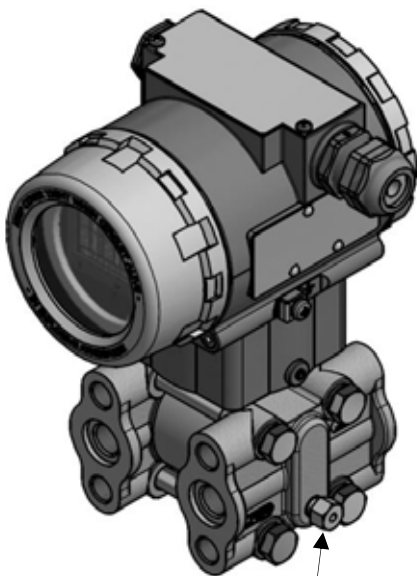

vent position:  
bottom (2x)

## Oval flange adapter 1/2" NPT female

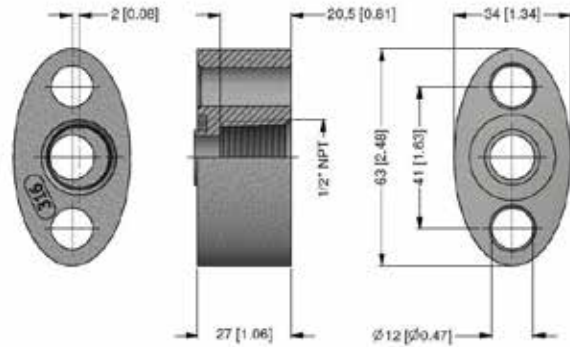**Technical data**



Material of adapter	stainless steel 1.4401 (316)
Weight	approx. 300 g
Scope of delivery	two adapter, four locking screws 7/16 UNF x 1 3/4" A2

**Ordering type**

Oval flange adapter with 1/2" NPT female

**Ordering code**

Z1004181

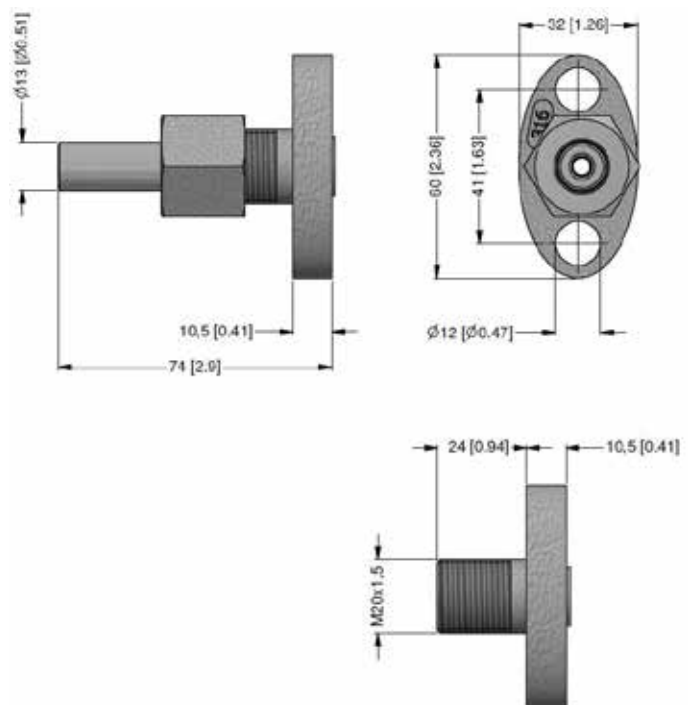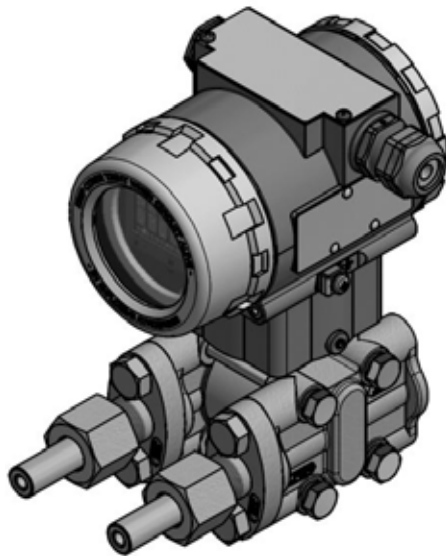Oval flange adapter M20x1.5 male with tube  $\phi 13$  mm (optionally with volume reduced flange - code N25)**Technical data**

Material of adapter / tube	stainless steel 1.4401 (316)
Weight	approx. 250 g
Scope of delivery	two adapter, four locking screws 7/16 UNF x 1" A2




**Ordering type**

Oval flange adapter M20x1.5 male with tube


**Ordering code**

Z1004182

### Mounting bracket

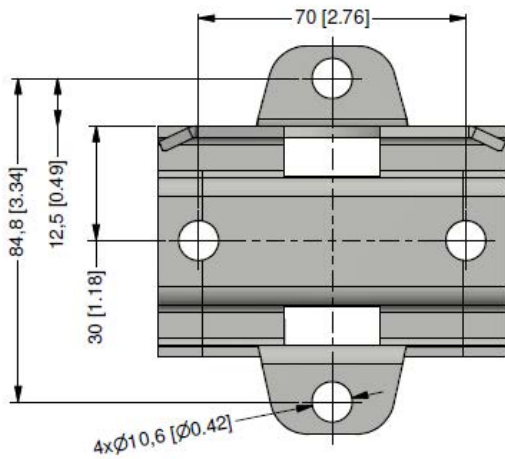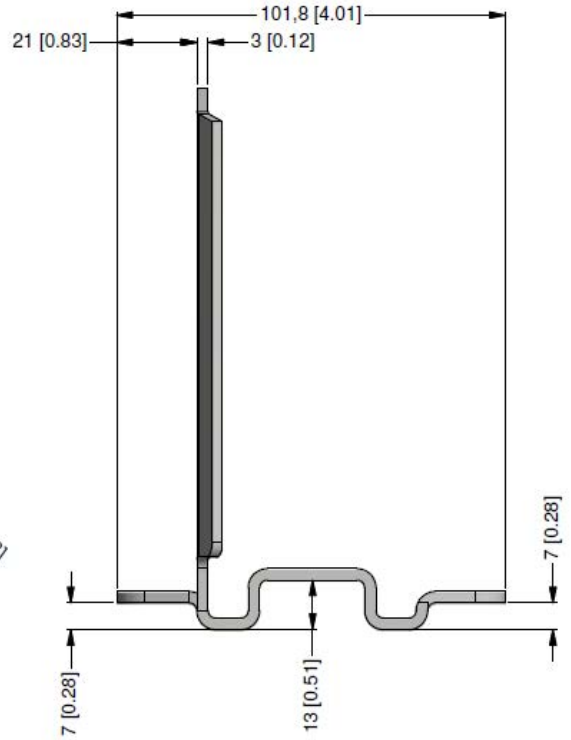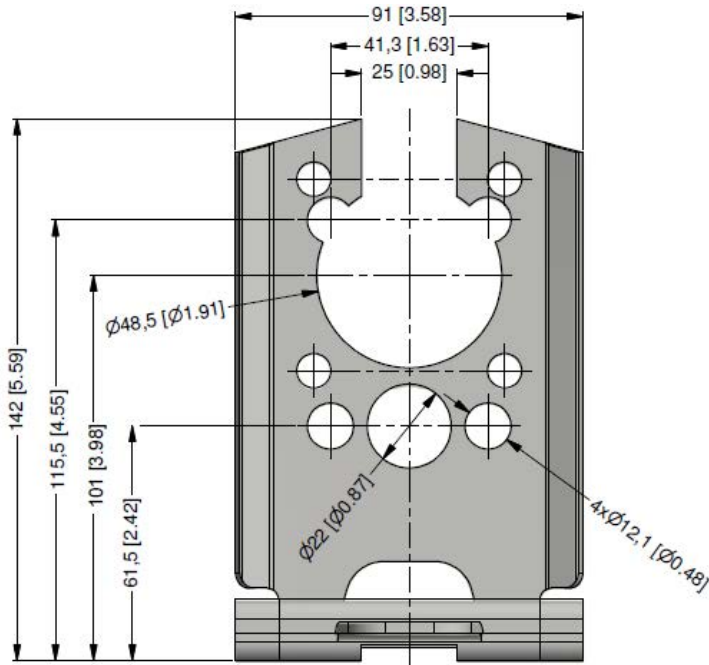

including U-bracket for pipe mounting:

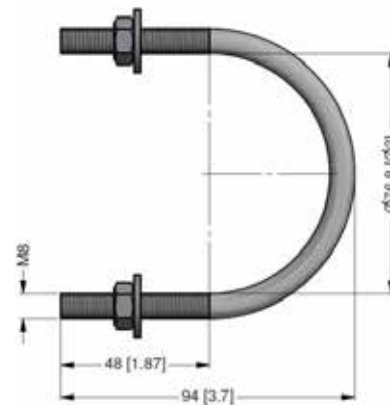

#### Technical data

Material of mounting bracket	stainless steel 1.4301 (304)
Weight	approx. 500 g
Scope of delivery	mounting bracket, four locking screws 7/16 UNF x 1 3/4" A2, U-bracket for pipe mounting with two nuts

#### Ordering type


Mounting bracket

#### Ordering code



Z1004179

## Mounting variants for mounting bracket

## wall mounting

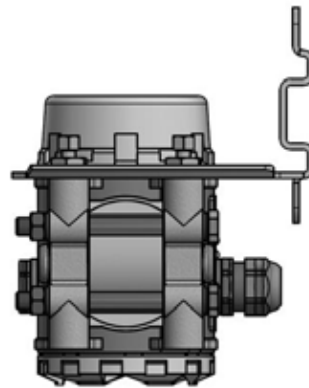

## pipe mounting

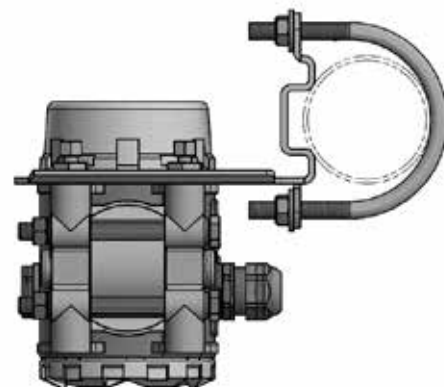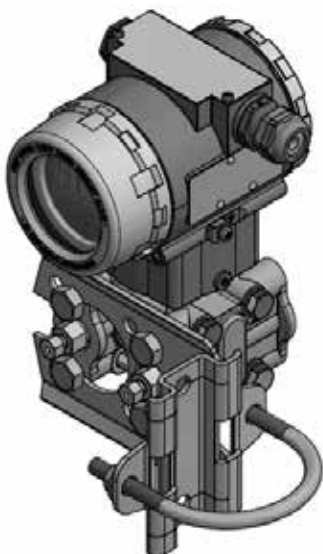

HART® is a registered trademark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.







# DPT 100

## Differential Pressure Transmitter for Process Industry

accuracy according to IEC 60770:  
0.1 % FSO

### Differential pressure

---

from 10 mbar up to 20 bar

### Static pressure

---

max. 400 bar

### Output signal

---

2-wire: 4 ... 20 mA

RS485 with Modbus RTU protocol

### Special characteristics

---

- ▶ compact design
- ▶ fast response time
- ▶ aluminium die cast case
- ▶ zero adjustment via button

### Optional versions

---

- ▶ several process connections

The differential pressure transmitter DPT 100 has been especially designed for fast test processes in leakage and flow measurement, where a fast response time and high sampling rate are necessary.

The compact design of the DPT 100 facilitates the usage in standardised applications. For instance, the installation in 19" racks.

The DPT 100 with optionally RS485 interface uses the communication protocol Modbus RTU which has found the way in industrial communication as an open protocol. The Modbus protocol is based on a master Slave architecture with which up to 247 Slaves can be questioned by a master – the data will transfer in binary form.

### Preferred areas of use are

---

Test engineering / leak testing



Machine and plant engineering



Environmental technology



Energy production



Modbus®

Differential pressure ranges						
Pressure range $P_N$ diff.	10 mbar	60 mbar	100 mbar	400 mbar	2.5 bar	20 bar
Pressure range $P_N$ symmetric (diff.)	$\pm 10$ mbar	$\pm 60$ mbar	$\pm 100$ mbar	$\pm 400$ mbar	on request	on request
Permissible static pressure	70 bar	400 bar	400 bar	400 bar	400 bar	400 bar

Output signal / Supply											
Standard	2 wire : 4 ... 20 mA / $V_S = 12 \dots 32 V_{DC}$										
Option	digital: RS 485 with Modbus RTU protocol / $V_S = 9 \dots 32 V_{DC}$ (delay time: 500 msec)										
Performance											
Accuracy <sup>1</sup>	$P_N \geq 60$ mbar: $\leq \pm 0.1$ % FSO $P_N < 60$ mbar: $\leq \pm 0.2$ % FSO										
Permissible load	$R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$										
Influence supply	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k $\Omega$										
Influence static pressure $P_N$ [Pa/100 bar]	<table border="1"> <tr> <td>10 mbar</td> <td>60 mbar</td> <td>400 mbar</td> <td>2.5 bar</td> <td>20 bar</td> </tr> <tr> <td>18</td> <td>30</td> <td>40</td> <td>250</td> <td>2000</td> </tr> </table>	10 mbar	60 mbar	400 mbar	2.5 bar	20 bar	18	30	40	250	2000
10 mbar	60 mbar	400 mbar	2.5 bar	20 bar							
18	30	40	250	2000							
Influence installation position	max. 400 Pa (can be compensated by zero-point correction) <b>for ranges &lt; 60 mbar please state installation position on the order</b>										
Long term stability	$P_N \geq 60$ mbar: $\leq \pm 0.05$ %FSO/ year at reference conditions $P_N < 60$ mbar: $\leq \pm 0.15$ %FSO/ year at reference conditions										
Sampling rate	250 Hz										
Turn-on time	approx. 260 msec										
Response time (10 ... 90 %)	10 msec										
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)											
Thermal effects (Offset and Span)											
Thermal error (offset and span)	$\leq \pm 0.1$ % FSO / 10 K										
Compensated range	-20 ... 80 °C										
Permissible temperatures	medium: -25 ... 85°C    electronics / environment: -25 ... 85°C    storage: -25 ... 85°C										
Electrical protection											
Short-circuit protection	permanent										
Reverse polarity protection	no damage, but also no function										
Electromagnetic compatibility	emission and immunity according to EN 61326										
Mechanical stability											
One-sided overload	according to the maximum static pressure of differential pressure sensor										
Vibration	5 g RMS (25 ... 2000 Hz)    according to DIN EN 60068-2-6										
Shock	100 g / 1 msec    according to DIN EN 60068-2-27										
Materials											
Pressure port / flange	<table border="1"> <tr> <td>standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td>option</td> <td>stainless steel 316 / 1.4401</td> <td>others: on request</td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401	others: on request				
standard	stainless steel 304 / 1.4301										
option	stainless steel 316 / 1.4401	others: on request									
Diaphragm	stainless steel 316L / 1.4404    others: on request										
Vent and dump valves											
Blanking plugs	<table border="1"> <tr> <td>standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td>option</td> <td>stainless steel 316 / 1.4401</td> <td></td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401					
standard	stainless steel 304 / 1.4301										
option	stainless steel 316 / 1.4401										
Bolts and nuts	<table border="1"> <tr> <td>standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td>option</td> <td>stainless steel 316 / 1.4401</td> <td>others: on request</td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401	others: on request				
standard	stainless steel 304 / 1.4301										
option	stainless steel 316 / 1.4401	others: on request									
Housing	aluminium die cast with epoxy painting (grey)    others: on request										
Cable gland	polyamide										
Seals (media wetted)	<table border="1"> <tr> <td>standard</td> <td>FKM</td> <td></td> </tr> <tr> <td>option</td> <td>EPDM, NBR</td> <td>others: on request</td> </tr> </table>	standard	FKM		option	EPDM, NBR	others: on request				
standard	FKM										
option	EPDM, NBR	others: on request									
Filling fluids	silicone oil    others: on request										
Media wetted parts	pressure port, seal of pressure port, diaphragm										

Miscellaneous	
Mounting bracket (optionally)	material C-steel or stainless steel 304 / 1.4401 weight 0.45 kg (incl. bolts and nuts)
Ingress protection	IP 66 / IP 67
Installation position	any <sup>2</sup>
Weight	approx. 1800 g
Current consumption	approx. 23 mA
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU      Pressure Equipment Directive: 2014/68/EU (module A) <sup>3</sup>

<sup>2</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point. Press the button for zero adjustment (see operating manual).


<sup>3</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar.

### Connections


Electrical connection	terminal clamps in clamping chamber (for cable-Ø max.2.5 mm <sup>2</sup> )	
Process connections	Standard option	internal thread 1/4" - 18 NPT / fixing 7/16 UNF internal thread 1/4" - 18 NPT / fixing M10      others: on request

### Wiring diagram

#### 2-wire-system (current)

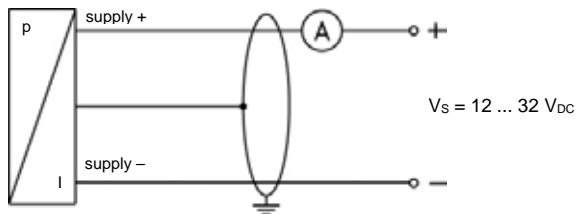


#### RS485 / Modbus RTU

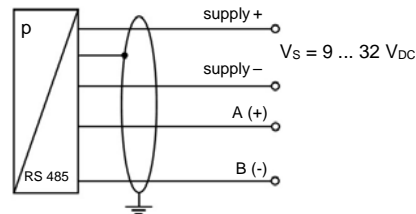

### Pin configuration

Electrical connection	terminal clamps	M12x1 / metal (4-pin)
Supply +	+ Ub	1
Supply -	- Ub	3
for RS485 / Modbus RTU:		
A (+)	A	2
B (-)	B	4
Ground		plug housing

### Dimensions (mm / in)

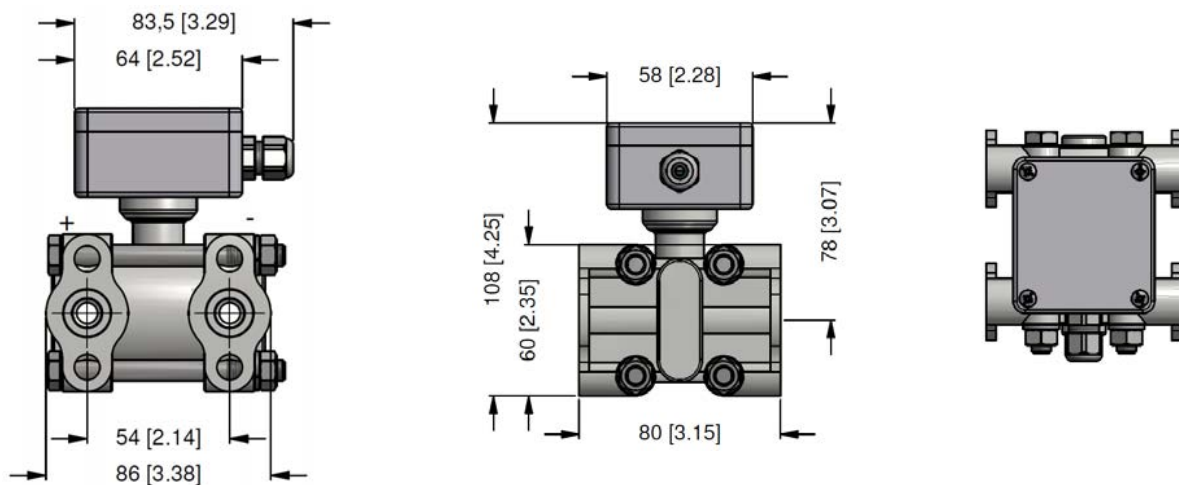





# DMD 331

## Differential Pressure Transmitter for Liquids and Gases

Stainless Steel Sensor

accuracy according to IEC 60770:  
0.5 % FSO

### Differential pressure

from 0 ... 20 mbar up to 0 ... 16 bar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

### Special characteristics

- ▶ differential pressure wet / wet
- ▶ permissible static pressure -onesided- up to 30 times of differential pressure range
- ▶ compact design
- ▶ mechanical robust and reliable at dynamic pressures as well as shock and vibration

### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for gases and dust
- ▶ different electrical and mechanical connections
- ▶ customer specific versions

The DMD 331 is a differential pressure transmitter for industrial applications and is based on a piezoresistive stainless steel sensor, which can be pressurized on both sides with fluids or gases compatible with SST 1.4404 (316L) and 1.4435 (316L).

The compact design allows an integration of the DMD 331 in machines and applications with limited space. The DMD 331 calculates the difference between the pressure on the positive and the negative side and converts it into a proportional electrical signal.

### Preferred areas of use are



Plant and machine engineering



Energy industry

### Preferred used for



Water












**Wiring diagrams**

2-wire-system (current)



3-wire-system (voltage)

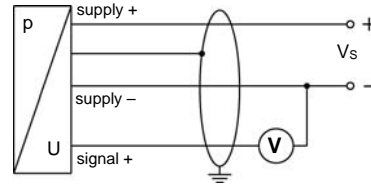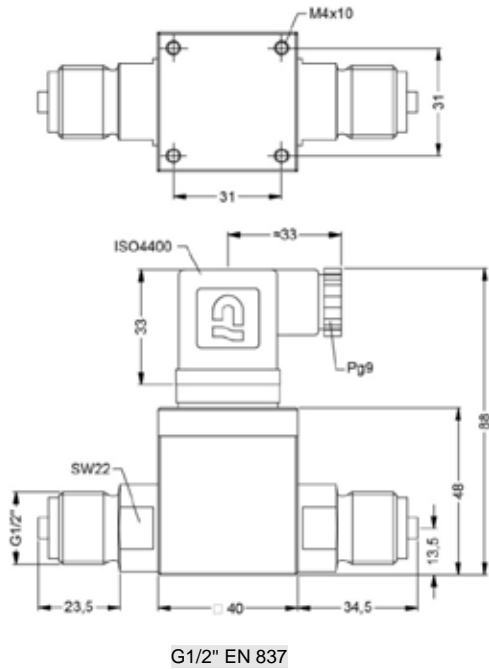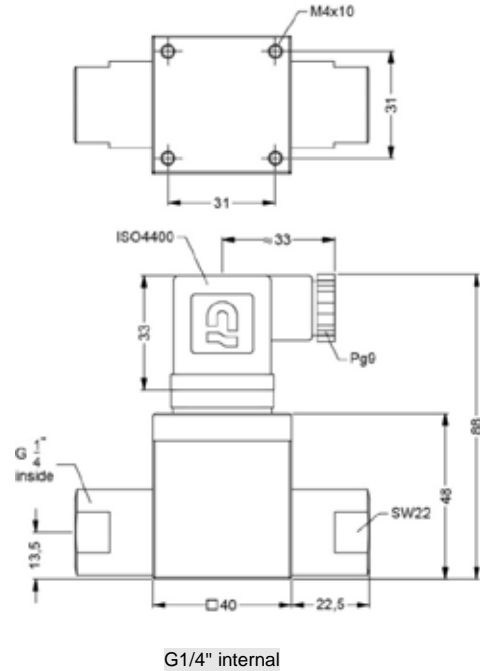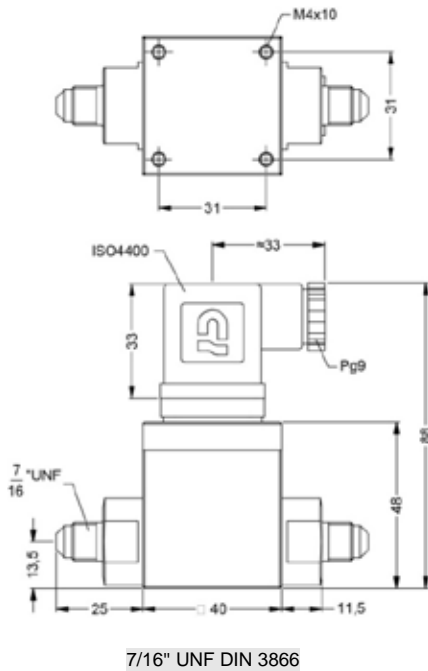**Mechanical connection (dimensions in mm)****standard****option**

### Ordering code DMD 331

DMD 331

□□□-□-□□□□-□-□-□□□□-□□□□-□-□□□

Pressure		7		3		0															
differential pressure		7		3		0															
Nominal pressure range [bar]																					
0.2								F													
0.4								A													
1.0								B													
2.5								C													
6.0								D													
16								E													
customer								9												consult	
Differential pressure range [bar]		F		A		B		C		D		E									
0.02		■		■		■		■		■		■		0		2		0		0	
0.04		■		■		■		■		■		■		0		4		0		0	
0.10		■		■		■		■		■		■		1		0		0		0	
0.25		■		■		■		■		■		■		2		5		0		0	
0.40		■		■		■		■		■		■		4		0		0		0	
0.60		■		■		■		■		■		■		6		0		0		0	
1.0		■		■		■		■		■		■		1		0		0		1	
2.5		■		■		■		■		■		■		2		5		0		1	
4.0		■		■		■		■		■		■		4		0		0		1	
6.0		■		■		■		■		■		■		6		0		0		1	
10		■		■		■		■		■		■		1		0		0		2	
16		■		■		■		■		■		■		1		6		0		2	
customer		■		■		■		■		■		■		9		9		9		9	
Output																					
4 ... 20 mA / 2-wire														1							
intrinsic safety 4 ... 20 mA / 2 wire														E							
0 ... 10 V / 3-wire														3							
customer														9						consult	
Accuracy																					
TD ≤ 1:5		0.5 % FSO												5							
TD > 1:5 up to 1:10		1.0 % FSO												8							
customer														9						consult	
Electrical connection																					
male and female plug ISO 4400														1		0		0			
customer														9		9		9		consult	
Mechanical connection																					
G1/2" EN 837														2		0		0			
7/16" UNF DIN 3866														U		0		0			
G1/4" internal thread														J		0		0			
customer														9		9		9		consult	
Seals																					
FKM														1							
customer														9						consult	
Special version																					
standard														0		0		0			
customer														9		9		9		consult	



# DMD 831

## Differential Pressure Transmitter with Display and Contact for Fluids and Gases

- ▶ 2 piezoresistive stainless steel sensors
- ▶ differential pressure from 0 ... 1 bar up to 0 ... 70 bar
- ▶ display mode selectable: P+, P-, ΔP
- ▶ display and pressure ports rotatable




### Technical Data

Input pressure range								
Nominal pressure <sup>1</sup>	[bar]	1	2	3.5	7	20	35	70
Differential pressure range	[bar]							
	TD 1:1	0 ... 1	0 ... 2	0 ... 3.5	0 ... 7	0 ... 20	0 ... 35	0 ... 70
	up to	up to	up to	up to	up to	up to	up to	up to
TD 1:10		0 ... 0.1	0 ... 0.2	0 ... 0.35	0 ... 0.7	0 ... 2	0 ... 3.5	0 ... 7
<sup>1</sup> nominal pressure corresponds to the maximal permissible static pressure (one-sided)								
Analogue signal / Supply								
Standard		3-wire: 4 ... 20 mA				24 V <sub>DC</sub> ± 10 %		
Permissible load		500 Ω						
Accuracy <sup>2</sup>		≤ ± 1 % BFSL						
<sup>2</sup> accuracy according to IEC 60770 (non-linearity, hysteresis, repeatability)								
Contact								
Number, type		standard: 1 PNP				option: 2 independent PNP		
Max. switching current		125 mA, short-circuit proof						
Switching accuracy <sup>2</sup>		≤ ± 0.5 % FSO						
Repeatability		≤ ± 0.1 % FSO						
Switching cycles		> 100 x 10 <sup>6</sup>						
Delay time		0 ... 100 sec						
Programming								
Adjustability		analogue output / contact refers to: pressure "P+" or pressure "P-" or pressure difference turn-down: max. 1:10						
Thermal error <sup>3</sup> (offset and span) / Permissible temperatures								
Tolerance band		≤ ± 1.5 % FSO						
TC, average		± 0.2 % FSO / 10 K						
In compensated range		0 ... 70 °C						
Permissible temperatures		medium:		-40 ... 125 °C				
		electronics / environment:		-25 ... 85 °C				
		storage:		-40 ... 85 °C				
<sup>3</sup> relating to nominal pressure range								
Electrical protection								
Short-circuit protection		permanent						
Reverse polarity protection		no damage, but also no function						
Electromagnetic compatibility		emission and immunity according to EN 61326						

Mechanical stability		
Vibration	10 g RMS (20 ... 2000 Hz)	according to DIN EN 60068-2-6
Shock	100 g / 11 msec	according to DIN EN 60068-2-27
Materials		
Pressure port	stainless steel 1.4404 (316L)	
Housing	PA 6.6, Polycarbonate	
Seals	FKM	others on request
Diaphragm	stainless steel 1.4435 (316L)	
Media wetted parts	pressure port, seals, diaphragm	
Miscellaneous		
Display	4-digit, red LED-display, digit size 7 mm; range of indication -1999 ... +9999; accuracy 0.1 % +/- 1 digit; digital damping 0.3 ... 30 sec (programmable)	
Current consumption	max. 60 mA (without switching current)	
Weight	approx. 350 g	
Operational life	100 million load cycles	
Ingress protection (device)	IP 65	

### Wiring diagram

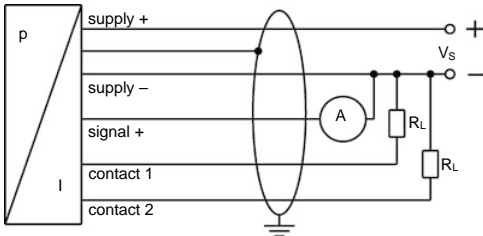

Pin configuration		
Electrical connections	M12x1 (5-pin), plastic	
Supply +	1	
Supply -	3	
Signal +	2	
Contact 1	4	
Contact 2	5	
Shield	via pressure port	

### Mechanical connections (dimensions mm / in)

**standard**

**option**

G1/2" EN 837
G1/4" DIN 3852
G1/4" EN 837
1/2" NPT
1/4" NPT







# DMD 341

## Differential Pressure Transmitter for Gases and Compressed Air in Compact Version

Silicon Sensor

accuracy according to IEC 60770:  
0.35 % / 1% / 2%

### Differential pressure

from 0 ... 6 mbar up to 0 ... 1000 mbar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

### Special characteristics

- ▶ aluminium housing
- ▶ suited for non-aggressive gases and compressed air



### Optional versions

- ▶ customer specific versions


The DMD 341 is a differential pressure transmitter for non-aggressive gases and compressed air. Because of its compact and robust aluminium housing it is particularly suited for machine and plant engineering.

Basic element of the DMD 341 is a piezo-resistive silicon sensor, which features high accuracy and excellent long term stability.

### Preferred areas of use are

-  Plant and machine engineering
-  Heating and air conditioning

### Preferred used for

-  Compressed air, non-aggressive gases



Input pressure range											
Nominal pressure $p_N$ (over, differential pressure) [mbar]	0...6	0...10	0...20	0...40	0...60	0...100	0...160	0...250	0...400	0...600	0...1000
Nominal pressure $p_N$ symmetric (differential pressure) [mbar]	± 6	± 10	± 20	± 40	± 60	± 100	± 160	± 250	± 400	± 600	± 1000
Overpressure [mbar]	100	100	200	350	350	1000	1000	1000	1000	3000	3000

Output signal / Supply	
Standard	standard pressure range: 2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$
Options 3-wire	standard pressure range: 3-wire: 0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$ 0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$

Performance	
Accuracy <sup>1</sup>	$p_N > 160$ mbar: $\leq \pm 0.35$ % FSO 40 mbar $\leq p_N \leq 160$ mbar: $\leq \pm 1$ % FSO $p_N < 40$ mbar: $\leq \pm 2$ % FSO
Permissible load	current 2-wire: $R_{max} = [(V_S - V_{S min}) / 0.02 A] \Omega$ current 3-wire: $R_{max} = 240 \Omega$ voltage 3-wire: $R_{min} = 10 k\Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k $\Omega$
Long term stability	$\leq \pm 0.2$ % FSO / year at reference conditions
Response time	< 5 msec

<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span)				
Nominal pressure $p_N$ [mbar]	$\leq 10$	$\leq 20$	$\leq 250$	$> 250$
Tolerance band [% FSO]	$\leq \pm 2$	$\leq \pm 1.5$	$\leq \pm 1$	$\leq \pm 0.5$
TC, average [% FSO / 10 K]	$\pm 0.3$	$\pm 0.25$	$\pm 0.15$	$\pm 0.08$
in compensated range	0 ... 60 °C			




Permissible temperatures	
Medium	-25 ... 125 °C
Electronics / environment	-25 ... 85 °C
Storage	-40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec


Materials	
Pressure port	G1/8" internal: aluminium, silver anodized flexible tube connection $\varnothing 6.6 \times 11$ : brass, nickel plated
Housing	aluminium, silver anodised
Seal (media wetted)	PUR, bonded
Sensor	silicon, glass, RTV, ceramics $Al_2O_3$ , nickel
Media wetted parts	pressure port, housing, seal, sensor

Miscellaneous	
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu$ H/m
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 250 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU


Pin configuration			
Electrical connection	ISO 4400 	M12x1 (4-pin), metal 	cable colour (IEC 60757)
Supply +	1	1	WH (white)
Supply -	2	2	BN (brown)
Signal + (only 3-wire)	3	3	GN (green)
Shield	ground pin 	4	GNYE (green-yellow)

### Wiring diagrams


#### 2-wire-system (current)




#### 3-wire-system (current / voltage)

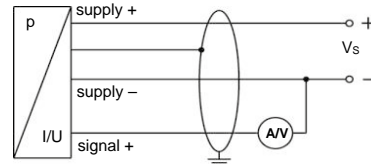


### Electrical connections (dimensions in mm)



ISO 4400 (IP 65)




M12x1, 4-pin (IP 67)




cable outlet with PVC-cable (IP 67)<sup>2</sup>

<sup>2</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); optionally cable with ventilation tube

### Mechanical connection (dimensions in mm)



connector ISO 4400  
G1/8"

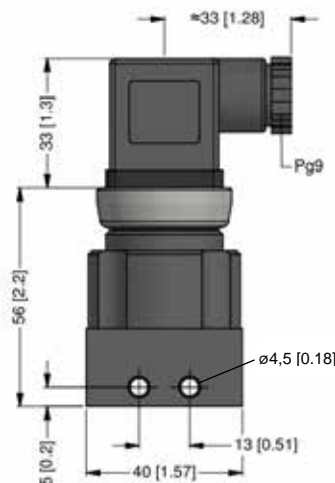

G1/8" internal



G1/8"

## Ordering code DMD 341

## DMD 341

□	□	□	-	□	□	□	□	-	□	-	□	□	□	□	-	□	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure																			
	differential pressure	3	3	0															
	gauge pressure	3	3	1															
Input		[mbar]																	
	6	0	0	6	0														
	10	0	1	0	0														
	20	0	2	0	0														
	40	0	4	0	0														
	60	0	6	0	0														
	100	1	0	0	0														
	160	1	6	0	0														
	250	2	5	0	0														
	400	4	0	0	0														
	600	6	0	0	0														
	1000	1	0	0	1														
	-6 ... 6	S	0	0	6														consult
	-10 ... 10	S	0	1	0														consult
	-20 ... 20	S	0	2	0														consult
	-40 ... 40	S	0	4	0														consult
	-60 ... 60	S	0	6	0														consult
	-100 ... 100	S	1	0	0														consult
	-160 ... 160	S	1	6	0														consult
	-250 ... 250	S	2	5	0														consult
	-400 ... 400	S	4	0	0														consult
	-600 ... 600	S	6	0	0														consult
	-1000 ... 1000	S	1	0	2														consult
	customer	9	9	9	9														consult
Output																			
	4 ... 20 mA / 2-wire					1													
	0 ... 20 mA / 3-wire					2													
	0 ... 10 V / 3-wire					3													
	customer					9													consult
Accuracy																			
	standard for $P_N > 160$ mbar	0,35 % FSO				3													
	standard for $40 \text{ mbar} \leq P_N \leq 160$ mbar	1,0 % FSO				8													
	standard for $P_N < 40$ mbar	2,0 % FSO				G													
	customer					9													consult
Electrical connection																			
	male and female plug ISO 4400					1	0	0											
	male plug M12x1 (4-pin), metal					M	1	0											
	cable outlet with PVC cable <sup>1</sup>					T	A	0											
	customer					9	9	9											consult
Mechanical connection																			
	G1/8" internal thread								Q	0	0								
	Ø 6.6 x 11 (for flex. tubes Ø 6)								Y	0	0								
	customer								9	9	9								consult
Seals																			
	PUR, bonded														6				
Special version																			
	standard															0	0	0	
	customer															9	9	9	consult

<sup>1</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)



# DPS 300

## Multi Range Differential Pressure Transmitter for Gas and Compressed Air

Silicon Sensor

accuracy according to IEC 60770:  
0.5% FSO BFSL

### Differential pressure

from 0 ... 1.6 mbar up to 0 ... 1000 mbar

### Output signals

3-wire: 0 ... 10 V, 0 ... 20 mA  
(0 ... 5 V, 4 ... 20 mA switchable)

2-wire: 4 ... 20 mA (optional)

### Special characteristics

- ▶ adjustable ranges
- ▶ high overpressure capability
- ▶ adjustable damping
- ▶ compact form

### Optional versions

- ▶ LC-display, two-line
- ▶ automatic zero adjustment
- ▶ contacts  
(only in combination with display)
- ▶ square root extraction  
(only in combination with display)

The pressure transmitter DPS 300 was developed for the differential pressure measuring for dry, non aggressive gases and compressed air and can be used for several HVAC applications

The DPS 300 is a multi range transmitter with up to three adjustable ranges.

The device is equipped with a two-line LC display optionally and can be parameterized simply. Values, status of the contact and the unit are shown on the display.

### Preferred applications are



HAVC applications  
e.g. air conditioning, clean room  
technology, filter monitoring



Medical

### Preferred areas of use are



Gas, compressed air



Input pressure range						
Nominal pressure $P_N$ [mbar] (differential, gauge pressure)	1.6	4	10	40	250	1000
Adjustable to [mbar]	1.0	2.5	6	25	60 / 160	400 / 600
Nominal pressure $P_N$ symmetric (differential pressure) [mbar]	$\pm 1.6$	$\pm 4$	$\pm 10$	$\pm 40$	$\pm 250$	$\pm 1000$
Max. static pressure [mbar]	200	200	200	345	1000	3000
Output signal / Supply						
Standard	3-wire:	switchable on:	0 ... 10 V / 0 ... 20 mA 0 ... 5 V / 4 ... 20 mA	$V_S = 19 \dots 32 V_{DC}$		
Option	2-wire:		4 ... 20 mA with automatic zero adjustment:	$V_S = 24 \dots 32 V_{DC}$ $V_S = 24 \dots 32 V_{DC}$		
Performance						
Accuracy	for $P_N \geq 6$ mbar: $\leq \pm 0.5\%$ FSO BFLS		for $P_N < 6$ mbar: $\leq \pm 1\%$ FSO BFLS			
Permissible load	voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$		current 3-wire: 330 $\Omega$			
	current 2-wire: $R_{max} = [(V_S - V_{Smin}) / 0,02 \text{ A}] \Omega$					
Influence effects	supply: 0.05 % FSO / 10 V		load: 0.05 % FSO / $\text{k}\Omega$			
Response time $T_{90}$	< 100 msec; adjustable by potentiometer in the range of 0 msec up to 5000 msec					
Turn on time	500 msec					
Long term stability	$\leq \pm 0.5\%$ FSO / year at reference conditions, for $P_N < 6$ mbar $\leq \pm 0.2\%$ FSO / year at reference conditions, for $P_N \geq 6$ mbar					
Measuring rate	12.5 Hz					
Contact (optional)						
	3-wire version			2-wire version		
Number, form	2 x relay-output (NO/NC)			2 x PNP-open-collector-contact		
switching current	max. 1 A			max. 125 mA resistant; short-circuit-proof		
switching voltage	max. 60 $V_{DC}$ ; max. 40 $V_{AC}$					
switching capacity	max. 60 W					
Accuracy of switching points	$\leq \pm 2\%$ FSO			$\leq \pm 2\%$ FSO		
Accuracy of repeatability	$\leq \pm 0.5\%$ FSO			$\leq \pm 0.5\%$ FSO		
Switching frequency	5 Hz			5 Hz		
Switching cycles	< 100 x 10 <sup>6</sup>			< 100 x 10 <sup>6</sup>		
Thermal effects / Permissible temperatures						
Thermal error (offset and span)	$\leq \pm 0.5\%$ FSO / 10 K (typ.) for $P_N < 6$ mbar		$\leq \pm 0.3\%$ FSO / 10 K (typ.) for $P_N \geq 6$ mbar			
in compensated range	0 ... 50 °C					
Permissible temperatures	medium: 0 ... 50°C		electronics / environment: 0 ... 50°C		storage: -10 ... 70°C	
Electrical protection						
Short-circuit protection	permanent					
Reverse polarity protection	no damage, but also no function					
Electromagnetic protection	EMC directive: 2014/30/EU			emission and immunity according to EN 61326		
Materials						
Pressure port	brass nickel plated					
Housing	ABS					
Sensor	ceramic, silicon, epoxy, RTV					
Media wetted parts	pressure port, PVC / silicone tube, sensor					
Display (optional)						
Performance	two-line LC-Display, visible range 32.5 x 22.5 mm; 5-digit 7-segment-main display, digit size 8 mm, range of indication: $\pm 9999$ ; 8-digit 14-segment-additional display, digit size 5 mm; 52-segment-bargraph; accuracy: 0.1% $\pm 1$ digit					
Functions	<ul style="list-style-type: none"> <li>- parameterisation of contacts</li> <li>- selection of units</li> <li>- selection of signal (linear, square root extraction)</li> <li>- cut-off-function (only with square root extraction)</li> <li>- min- / max-value</li> <li>- recalibration</li> <li>- autozeroing</li> <li>- factory setting</li> </ul>					



Miscellaneous		
Current consumption	2-wire: max. 22 mA (during automatic zero adjustment: +23 mA)	3-wire: max. 30 mA
Weight	approx. 200 g	
Ingress protection	IP 54	
Installation position	vertical <sup>1</sup>	
Operational life	100 million load cycles	

<sup>1</sup> The devices are calibrated in a vertical position with pressure port down. If this position is changed on installation there can be slight deviations in the zero point.

Mechanical connections (dimensions in mm)	
Standard	Ø 6.6 x 11 (for flex. tubes Ø 6)
Option	Ø 4.4 x 10 (for flex. tubes Ø 4)

Electrical connections (conductor cross-section)	
Without ferrule	1.5 mm <sup>2</sup>
With ferrule	1 mm <sup>2</sup>

Pin configuration		
Standard	cable gland M16x1.5	
Electrical connections	3-wire	2-wire
supply +	VS +	VS +
supply -	VS -	VS -
signal + (only for 3-wire)	Iout / Vout	-
contact 1	C1 / NO1 / NC1	S1
contact 2	C2 / NO2 / NC2	S2

### Wiring diagram

<p>3-wire-system (current / voltage)</p>	<p>3-wire-system (current / voltage) with 2 contacts</p>
<p>2-wire-system (current)</p>	<p>2-wire-system (current) with 2 contacts</p>

### Dimension (in mm)

standard	option
<p>DPS 300 without display</p>	<p>DPS 300 with display</p>





# DPS 200

**Differential Pressure Transmitter for Gas and Compressed Air**

Applications:

- ▶ for HVAC-applications

Characteristics:

- ▶ piezoresistive silicon sensor
- ▶ differential pressure range 6 ... 1000 mbar

Technical Data



Input pressure range													
Nominal pressure P <sub>N</sub> [mbar] (differential, gauge pressure)	6	10	16	25	40	60	100	160	250	400	600	1000	
max. static pressure [mbar]	200	345	345	345	345	345	345	1000	1000	3000	3000	3000	

Output signal / Supply		
Standard	3-wire: 0 ... 10 V	V <sub>S</sub> = 19 ... 32 V <sub>DC</sub>
Option	2-wire: 4 ... 20 mA 3-wire: 4 ... 20 mA	V <sub>S</sub> = 11 ... 32 V <sub>DC</sub> V <sub>S</sub> = 19 ... 32 V <sub>DC</sub>

Performance	
Accuracy	≤ ± 1% FSO BFSL
Permissible load	current 2-wire: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>Smin</sub> ) / 0,02 A] Ω current 3-wire: 330 Ω voltage 3-wire: 10 kΩ
Influence effects	supply: ≤ ± 0.1 % FSO/10V load: ≤ ± 0.1 % FSO/kΩ
Response time (0 ... 100%)	2-wire: adjustable by potentiometer in the range of 500 msec up to 2.5 sec 3-wire: adjustable by potentiometer in the range of 50 msec up to 2.5 sec
Long term stability	≤ ± 0,5% FSO / year at reference conditions
Measuring rate	2-wire: 8 Hz 3-wire: 1 kHz

Thermal effects (Offset and Span) / Permissible temperatures			
Thermal error (offset and span)	≤ ± 0.3 % FSO / 10 K (typ.)		
in compensated range	0 ... 50 °C		
Permissible temperatures	medium: 0 ... 50°C	electronics / environment: 0 ... 50°C	storage: -10 ... 70°C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic protection	emission and immunity according to EN 61326

Materials	
Pressure port	brass nickel plated
Housing	ABS
Sensor	ceramic, silicon, epoxy, RTV
Media wetted parts	pressure port, PVC / silicone tube, sensor

Miscellaneous	
Display (optional)	LC-Display, visible range 32.5 x 22.5 mm; 5-digit 7-segment-main display, digit size 8 mm, 8-digit 14-segment-additional display, digit size 5 mm; 52-segment-bargraph
Current consumption	2-wire: signal output current: max. 22 mA 3-wire: signal output current: max. 30 mA signal output voltage: 7.5 mA (20 mA short circuit) display: + 1 mA
Units	following units can be set at factory: [bar], [mbar], [PSI], [Inch Hg], [cm Hg], [mm Hg], [hPa], [kPa], [MPa], [mH <sub>2</sub> O], [Pa], [mmH <sub>2</sub> O]
Ingress protection	IP 54
Weight	approx. 165 g
Installation position	vertical <sup>1</sup>
Operational life	100 million load cycles


<sup>1</sup> The devices are calibrated in a vertical position with the pressure port down. If this position is changed on installation there can be slight deviations in the zero point.

#### Mechanical connections (dimensions in mm)


Standard	Ø 6.6 x 11 (for flex. tubes Ø 6)
Option	Ø 4.4 x 10 (for flex. tubes Ø 4)

#### Wiring diagram

2-wire-system (current)



3-wire-system (current / voltage)

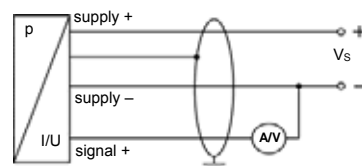


#### Pin configuration


Electrical connections	Terminals 2-wire-system	Terminals 3-wire-system
supply + supply - signal + (only for 3-wire)	2 / + 3 / - 1 (not connected)	2 / V <sub>S</sub> + 3 / V <sub>S</sub> - 1 / SIG

#### Dimensions (in mm)

standard:  
DPS 200 without display

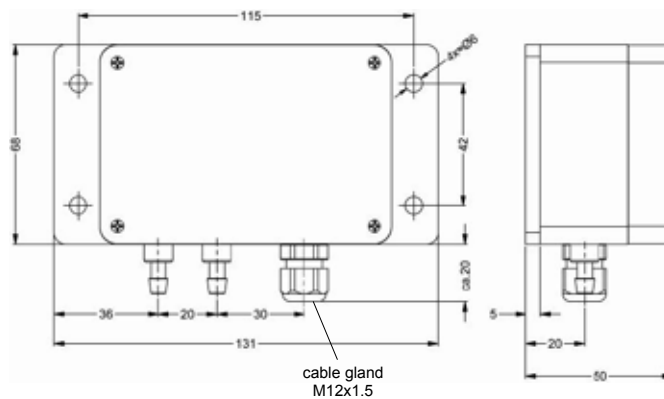

optional:  
DPS 200 with display

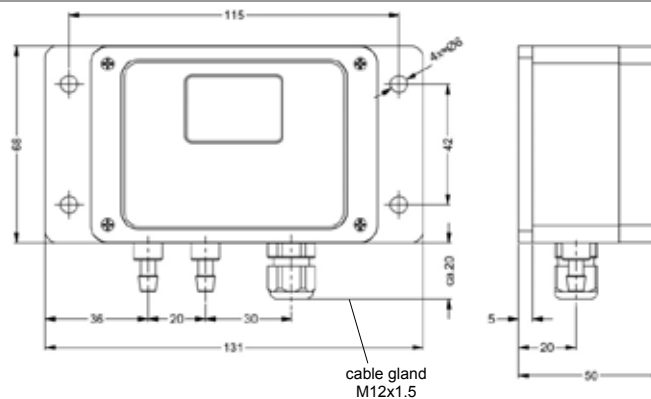

### Ordering code DPS 200

DPS 200

□	□	□	-	□	□	□	□	-	□	-	□	-	□	-	□	-	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

<b>Pressure</b>																				
	differential pressure	8	1	0																
	gauge pressure	8	1	1																consult
<b>Input</b>																				
	[mbar]																			
	6				0	0	6	0												
	10				0	1	0	0												
	16				0	1	6	0												
	25				0	2	5	0												
	40				0	4	0	0												
	60				0	6	0	0												
	100				1	0	0	0												
	160				1	6	0	0												
	250				2	5	0	0												
	400				4	0	0	0												
	600				6	0	0	0												
	1000				1	0	0	1												
	customer				9	9	9	9												consult
<b>Output</b>																				
	0 ... 10 V / 3-wire																			3
	4 ... 20 mA / 2-wire																			1
	4 ... 20 mA / 3-wire																			7
	customer																			9
<b>Accuracy</b>																				
	1 % FSO BFSL																			G
<b>Display</b>																				
	without display																			0
	LC display																			C
	customer																			9
<b>Front foil</b>																				
	BD SENSORS																			1
	neutral																			N
	customer																			9
<b>Mechanical connection</b>																				
	Ø6.6 x 11 (for flex. tubes Ø6)																			Y 0 0
	Ø4.4 x 10 (for flex. tubes Ø4)																			Y 0 2
	customer																			9 9 9
<b>Pressure port</b>																				
	brass nickel plated																			M
	customer																			9
<b>Special version</b>																				
	standard																			0 0 0
	customer																			9 9 9

## COMPETENCE

---

Industrial pressure measurement technology from 0.1 mbar up to 8000 bar

- > pressure transmitters, electronic pressure switches or hydrostatic level probes
- > OEM or high-end products
- > standard products or customized solutions

BD|SENSORS has the right pressure measuring device at the right price.

## PRICE / PERFORMANCE

---

Pressure measurement at the highest level

The concentration on electronic pressure transmitter has led to extraordinary efficiency and economical pricing.

BD|SENSORS is certain to be one of the most economical suppliers on the world market, given equal technical and commercial conditions.

## RELIABILITY

---

Projectable delivery times and strict observance of deadlines

Short delivery times and firm deadlines, even for special designs, make BD|SENSORS a reliable partner for our customers.

BD|SENSORS reduces the level of your stock-keeping and increases your profitability.

## FLEXIBILITY

---

We have special solutions for your individual requirement.

We solve your problem in industrial pressure measurement quickly and economically, not only with large-scale production lines, but also for smaller requirements.

BD|SENSORS is especially flexible when technical support and quick assistance are required in service case as well as for rush orders.

## INDUSTRIES



plant and machine engineering



chemical and biochemical industry



energy industry



renewable energy



semiconductor industry /  
cleanroom technology



HVAC



hydraulics



refrigeration



calibration techniques



laboratory techniques



medical technology



food and beverage



vehicles and mobile hydraulics



oil and gas industry



pharmaceutical industry



marine / shipbuilding / offshore



heavy industry



environmental industry



packaging and paper industry

## MEDIA



sewage



aggressive media



colours



gases



fuels and oils



pasty and viscous media



oxygen



water





### **DISTRIBUTION WORLDWIDE**

HEADQUARTER DER BD | SENSORS GROUP

BD | SENSORS GmbH  
BD-Sensors-Straße 1  
95199 Thierstein  
GERMANY

Tel.: +49 9235 9811-0  
Fax: +49 9235 9811-11

[www.bdsensors.de](http://www.bdsensors.de)  
[info@bdsensors.de](mailto:info@bdsensors.de)



### **DISTRIBUTION EASTERN EUROPE**

BD | SENSORS s.r.o.  
Hradištská 817  
68708 Buchovice  
CZECH REPUBLIC

Tel.: +420 572 411-011  
Fax: +420 572 411-497

[www.bdsensors.cz](http://www.bdsensors.cz)  
[sale@bdsensors.cz](mailto:sale@bdsensors.cz)

### **DISTRIBUTION RUSSIA**

BD | SENSORS Rus  
37a, Varshavskoe shosse  
117105 Moscow  
RUSSIA

Tel.: +420 572 411-011  
Fax: +420 572 411-497

[www.bdsensors.ru](http://www.bdsensors.ru)  
[sales@bdsensors.ru](mailto:sales@bdsensors.ru)

### **DISTRIBUTION CHINA**

BD | SENSORS China  
Building B, 2nd floor,  
Building 10, No. 1188, Lianhang Road  
Pujiang Town, Minhang District, Shanghai  
CHINA

Tel.: +86 21 51600190  
Fax: +86 21 33600610

[www.bdsensors-china.com](http://www.bdsensors-china.com)  
[info@bdsensors-china.com](mailto:info@bdsensors-china.com)